SWITCH TWO

2-channel actuator module

AURATON Switch TWO allows you to remotely and independently control lighting or two electrical devices e.g. consumer electronics (it works with any two electrical devices, each with a voltage of 12-30V DC and 60-240V AC; maximum load per channel 4.3A).

AURATON Switch TWO cooperates with the AURATON Pulse control panel and the AURATON Smart App, thanks to which the user can not only switch devices on and off using a smartphone or tablet, but also set their operating schedule. In the case of lighting, for example, it is possible to switch on the lights when you are away from home, simulating your presence, or to switch on various light points with a single touch. In addition to increasing comfort and security, AURATON Switch TWO monitors energy consumption and the app recalculates it according to the supplier's tariff, allowing you to control your bills. AURATON Switch TWO is equipped with an LED that indicates the current operating status. The device is easy to install and fits into deep Ø60 mm junction boxes.



protection of the connected device



convenient management of lighting and connected devices



secure connection with AURA protocol



accurate measurement of energy consumption



Auraton Pulse















AC supply voltage	60-240 V AC, 50-60 Hz
DC supply voltage	12-30 V DC
Maximum power consumption	≤1 W
Power consumption in stand-by mode	≤0,4 W
Operating temperature range	0 - 35°C
Permissible load	up to 4.3 A (<1kW) per channel, for resistive loads
Security type	Required external overcurrent circuit breaker with a maximum current of 10 A
Control element	Electromagnetic, micro-gap relay
Control method	remote – by OTA locally – using the button
Cooperation with internet control panel	AURATON Pulse
Operating range	approx. 30 m
Radio frequency	868,150 MHz; 868,450 MHz
Radio signal strength	Up to 11 dBm
Radio receiver category	2
Radio protocol	AURA
Ingress protection	IP20







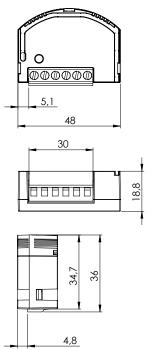

FOR SMARTER LIVING















